

## **APPLICATION FOR ENTRANCE PERMIT**

PERMIT # EP\_\_\_\_\_\_\_Valid for 1 year only

DATE OF APPLICATION ROLL #	Lot	Concession € Adjala
		€Tosorontio
911 # Street Name		
A DDI IO ANIT NAME		
MAILING ADDRESS		
EMAIL ADDRESS		
PROPERTY OWNER NAME		PHONE #
MAILING ADDRESS		
□ COMMERCIAL □ RESIDENTIAL	☐ FIELD OR BUSH	□ DEPOSITION OF FILL
HIS IS TO CERTIFY THAT I AM THE ABOVE NAMED AMED PROPERTY OWNER. I UNDERSTAND THAT PERATED AT THE EXPENSE OF THE UNDERSIGNIEN ISSUED BY THE TOWNSHIP, AS WELL AS AN EQUIRED. ALL WORK IS TO MEET PROVISIONS OF	ALL WORK WILL BE CONST ED AND THAT WORK MUST IY OTHER AUTHORITY OR .	TRUCTED, ALTERED, MAINTAINED NOT BEGIN BEFORE A PERMIT
IGNATURE:	DATE: _	
HIS APPLICATION IS HEREBY MADE TO: (check all t	hat apply)	
☐ CONSTRUCT AN UNPAVED ENTRANCE	□ CONSTRUCT AN I	ENTRANCE FOR THE DEPOSITION OF
RESIDENTIAL FARM USE	□ CHANGE THE DES	SIGN OF AN EXISTING ENTRANCE
□ CONSTRUCT A PAVED ENTRANCE □ RESIDENTIAL □ FARM USE	☐ CHANGE THE LO	CATION OF AN EXISTING ENTRANCE
USE AN EXISTING ENTRANCE FOR OTHER THAN IT ORIGINAL, PRESENT OR NORMAL USE		ER CURBS, GUTTERS OR OT RKS RELATED TO A NEW ENTRANCE
CONSTRUCT A TEMPORARY ENTRANCE OR USE AN PART OF THE RIGHT-OF-WAY OF A TOWNSHIP ROAD A		TTERS OR OTHER PERMANENT WO
A MEANS OF TEMPORARY ACCESS TO AND FROM PROPERTY	A	TION OF AN EXISTING ENTRANCE
PLEASE MARK THE PROPOSED ENTRANCE	CLEARLY WITH STAKES	FOR INSPECTION PURPOSES
<u> </u>	SITE PLAN	
	ANCE FROM CLOSEST PROPER TH DIRECTION INDICATED	RTY LINE TO PROPOSED ENTRANCE
Nearest 911#		Nearest 911#
Road Name:		
	OFFICE USE ONLY	
SIZE OF CULVERT Diameter Length Gauge REQUIRED		Date
REMARKS:		
FINAL APPROVAL BY	Date	DEPOSIT RETURNED YES NO
PAYMENT - FEE: \$250 Res \$350 Com CASH CHEQUE	AMOUNT:	RECEIPT#
PAYMENT - DEPOSIT: \$2000 CASH CHEQUE		

DEPOSITS WILL NOT BE REFUNDED IF THIS APPLICATION EXCEEDS THE ONE YEAR DEADLINE.



## 7855 Sideroad 30 Alliston, ON L9R 1V1

Phone: 705-434-5055 Fax: 705-434-5051

www.adjtos.ca

PUBLIC WORKS DEPARTMENT

#### **ENTRANCE PERMITS**

An entrance permit FEE is required and can be paid at the Township Office. A DEPOSIT is also required which will be refunded upon completion of final inspection and approval. All entrance permits are valid for 1 full year from the date of application. If we have not received your final approval/refund request prior to the one year date of application, your file will be closed and deposit will not be refunded.

**PLEASE NOTE:** Please note that the owner of the property is solely responsible for ensuring that all required permits are obtained from the appropriate entities and that all work to be completed is in compliance with both the Township's requirements, as well as any other agency or jurisdiction in which an approval and/or permit is required (Ie. NVCA or TRCA).

Nottawasaga Valley Conservation Authority

8195 Line 8 Utopia, Ontario LOM 1TO

Phone: (705) 424-1479

Toronto and Region Conservation Authority

5 Shoreham Drive Downsview, Ontario

M3N 1S4

Phone: (416) 661-6600

- Note: Please call to schedule an appointment -

### ENTRANCE STANDARDS AND SPECIFICATIONS

In general, all entrances must be located to provide suitable spacing and visibility requirements as follows unless specified otherwise within the permit at the discretion of the Superintendent:

- 1. With a posted speed of 80 km/h, at least 30.0 metres from an intersection.
- 2. No entrances to be permitted within a sight triangle.
- 3. Minimum distance between driveway and lot line is 1.5 metres (4.9 feet) from side lot line.
- 4. With a posted speed of 80 km/h, minimum allowable distance of 65 metres from the entrance to the end of the bridge deck.
- 5. With a posted speed of less than 80 km/h, minimum distance from the end of a bridge deck to be determined by the Superintendent.
- 6. Minimum vertical and horizontal sight distances required are as follows for residential and commercial entrances: Minimum Ciaht

	iviinimum Signt
Speed Limit	Distance in Metres
50 km/h	65
60 km/h	85
70 km/h	110
80 km/h	135

- 7. Designs not outlined above are to be as per the Ministry of Transportation Geometric Design Standard Manual.
- 8. All commercial entrances must meet the above criteria plus the criteria established in the Ministry of Transportation's Commercial Site Access Policy and Standard Designs Manual.
- 9. Minimum vertical and horizontal sight distances required are as follows for an entrance for the deposition of fill:

	Minimum Sight
Speed Limit	Distance in Metres
50 km/h	135
60 km/h	170
70 km/h	200
80 km/h	230


10. Entrances within subdivisions and built-up hamlet areas are to be constructed in conformity with the Engineering Design Criteria Manual.

#### **INSTALLATION SPECIFICATIONS**

All entrances must be constructed to the satisfaction of the Superintendent and to meet the following specifications unless specified otherwise within the permit at the discretion of the Superintendent:

- 1. Minimum entrance culvert diameter is 400 mm.
- 2. Minimum residential entrance culvert width is 9.0 metres.
- 3. Minimum commercial entrance culvert width is 12.0 metres.
- 4. Minimum entrance for the deposition of fill material is 12.0 metres.
- 5. Residential entrance culvert to be new, minimum 1.6 mm (16 gauge) thickness helical c.s.p.
- 6. Commercial entrance culvert to be new, minimum 2.0 mm (14 gauge) thickness helical c.s.p.
- 7. Entrance culvert for the deposition of fill material to be new, minimum 2.8 mm (12 gauge) thickness helical c.s.p.
- 8. Entrance culvert to have end protection or headwalls suitable for protecting the ends of the culvert from crushing.
- 9. Culvert headwalls may not be higher than the level of the road shoulder at the rounding.
- 10. Entrances for the deposition of fill to have marking or delineation for easy identification.
- 11. Entrance culverts shall be constructed to the proper grade so as to provide for the free and unimpeded flow of water through the culvert.
- 12. Residential culverts shall be covered with granular "A" material, equal in depth to at least 150 mm or one-third of the culvert diameter, whichever is greater.
- 13. Commercial or entrance culverts for the deposition for fill material shall be covered with granular "A" material, equal in depth to at least 250 mm or one-third of the culvert diameter, whichever is greater.
- 14. Surface of entrance may not be higher than the level of the road shoulder at the rounding.
- 15. Entrance gradient to be 6% maximum for residential entrances, 10% maximum for farm and field entrances.
- 16. Entrance to be designed to prevent the flow of water onto the travelled portion of the roadway.
- 17. Entrances must have an unobstructed sight triangle
- 18. <u>Final Inspection Request Form must be received prior to 1 year date of application for final inspection and refund of deposit</u>.

## Adjala-Tosorontio Horizontal Curve Sight distance calculation

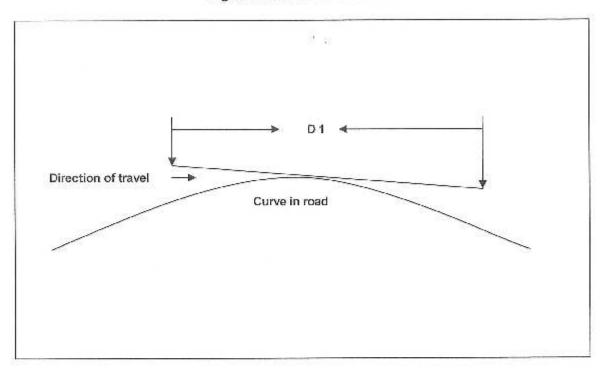


## D1 = sight distance required

D1 is measured from edge of road to edge of road in a straight line

	Residential/Commercial Entrances	Deposition of Fill Entrances
	Sight Distance Speed	Sight  Distance Speed
D1=	135m 80 km/h 110m 70 km/h 85m 60 km/h 65m 50 km/h	230m 80 km/h 200m 70 km/h 170m 60 km/h 135m 50 km/h

Roads with no posted speed limit are taken to have a speed limit of 80 km/h as per the highway traffic act.

## Adjala-Tosorontio Vertical curve Sight distance calculation

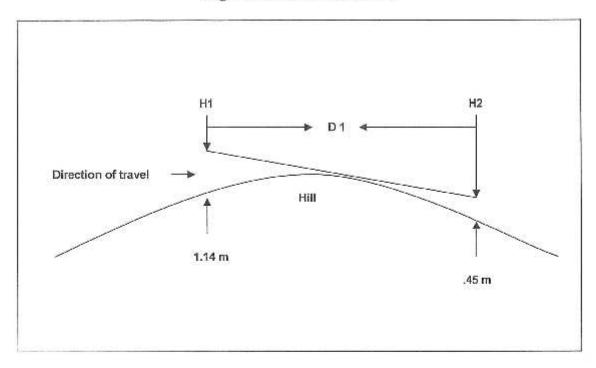

H1 = 1.14 m


H2 = .45 m

D1 = sight distance required

	Residential/Commercial Entrances	Deposition of Fill Entrances
	Sight Distance Speed	Sight Distance Speed
D 1 =	135m 80 km/h 110m 70 km/h	230m 80 km/h 200m 70 km/h
	85m 60 km/h 65m 50 km/h	170m 60 km/h 135m 50 km/h

Roads with no posted speed limit are taken to have a speed limit of 80 km/h as per the highway traffic act.

# Adjala-Tosorontio Sight Triangle calculation

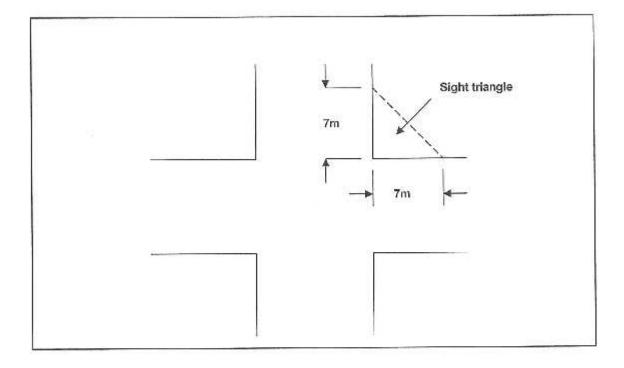

## Sight Triangle

The sight triangle is the area from the intersection of two roads, measured 7m in both directions on the property lines with a straight line drawn between these points